

Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

Design for Standby Power Applications



【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 years, Standard Commercial

【Operating Temperature Range】

Nominal Operating Temperature: 25°C (77°F)
Discharge: -15°C ~ 50°C (5°F ~ 122°F)
Charge: -15°C ~ 40°C (5°F ~ 104°F)
Storage: -15°C ~ 40°C (5°F ~ 104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】

14.4 ~ 15.0 VDC/Unit at 25°C (77°F)


【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Design according with IEC 61056-1/2: 2012

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity	17Ah@20HR-rate to 1.75V per cell @25°C (77°F)	
Weight	Approx. 5.50 Kg (12.12 lbs)	
Maximum Discharge Current	230A (5sec)	
Internal Resistance	Approx. 14.0 mΩ	
Short Circuit Current	532A	
Maximum Charge Current	5.10A	
Terminal types	B1/B3/B1B terminal to accept M5 bolt	
Terminal tightening torque	30.4±6.1 Kgf·cm / 26.4±5.3 Lbf·in / 3.0±0.6 N·m	
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request	
Dimensions	Length (L)	181.0±2.0 mm 7.13±0.08inch
	Width (W)	76.2±1.0 mm 3.00±0.04inch
	Container Height (h)	167.0±2.0 mm 6.57±0.08inch
	Overall Height (H)	167.0±2.0 mm 6.57±0.08inch

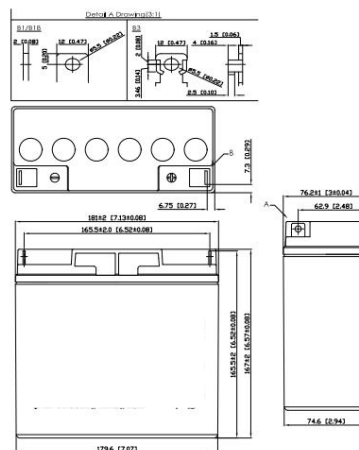

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	80.2	50.9	38.5	23.4	13.8	10.1	8.03	5.72	3.63	2.37	1.93	1.00
1.65V	71.2	47.5	36.5	22.9	13.7	10.0	7.99	5.69	3.61	2.35	1.90	0.95
1.70V	67.4	45.8	35.6	22.7	13.6	9.99	7.97	5.67	3.60	2.34	1.89	0.94
1.75V	61.0	43.1	34.1	22.3	13.4	9.86	7.92	5.64	3.59	2.32	1.86	0.91
1.80V	54.5	40.2	32.7	21.8	13.3	9.79	7.87	5.61	3.58	2.30	1.83	0.88
1.85V	48.0	37.3	31.0	21.2	13.1	9.68	7.80	5.56	3.56	2.27	1.80	0.85

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	890	583	449	281	166	121	96.4	68.6	43.6	28.4	23.1	12.0
1.65V	790	544	423	275	164	120	96.0	68.5	43.4	28.3	22.8	11.5
1.70V	748	527	413	272	163	119	95.8	68.4	43.3	28.2	22.7	11.3
1.75V	677	493	395	267	161	119	95.3	67.9	43.2	27.9	22.4	10.9
1.80V	605	460	377	261	160	118	94.6	67.3	43.0	27.6	22.0	10.5
1.85V	533	427	361	254	158	116	93.8	66.8	42.9	27.3	21.7	10.1

Please refer to the official site for the latest rating confirmation.

Guang dong Xi shi Power Co.,Ltd

Tel: (总机) 020-84854238 Fax: 020-84854238

E-mail: csbusa@battery.com